


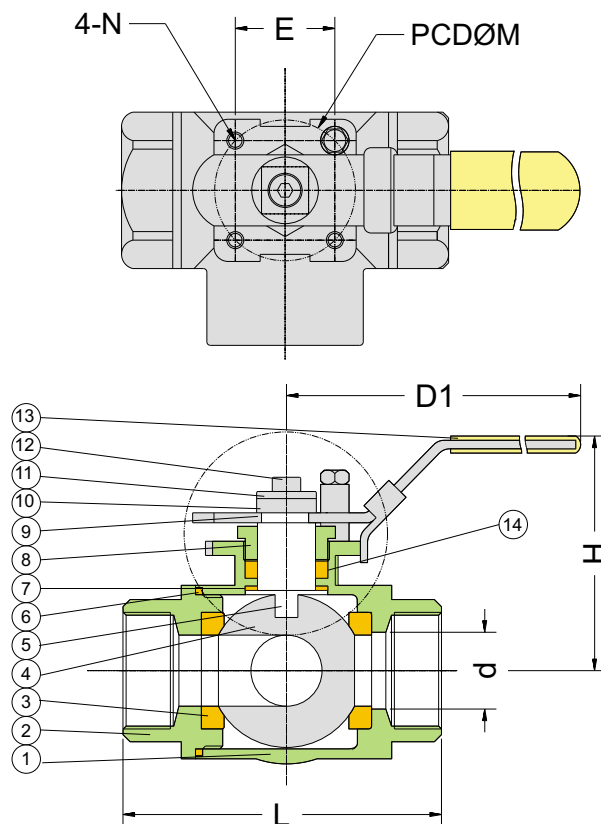

3-C DN8~DN50 (1/4"~2")


牙口三通式减流球阀

- 防爆中轴
- 带 ISO5211 平台座
- 工作压力: 1000psi PN63 bar
- 适用温度范围: -20 to 180°C
- 挂锁装置
- L型埠或T型埠可用360° 旋转把手

TURN PORT	0°	90°	180°	270°
L				
T				

MATERIALS LIST

NO	部件名称	PART	MATERIAL
1	本体	BODY	A351 GR.CF8M
2	侧盖	CAP	A351 GR.CF8M
3	球垫	SEAT	PTFE
4	钢球	BALL	A351 GR.CF8M
5	中轴	STEM	S.S. 316
6	大薄片	END SEALS	PTFE
7	小薄片	THRUST WASHER	PTFE
8	轴帽	GLAND	S.S.304
9	把手	HANDLE	S.S.304
10	四角铁圈	HANDLE WASHER	S.S.304
11	圆孔垫圈	WASHER	S.S.304
12	螺丝	HANDLE NUT	S.S.304
13	胶套	HANDLE SLEEVE	VINYL GRIP
14	中口	STEM PACKINGS	PTFE



DIMENSIONS

unit:mm

SIZE	d	L	H	D1	A	B	C	D	E	F	M	N
1/4"	11.0	57.2	62.7	133.0	11.0	6	12	9	25.0	29.0	36	M5*0.8
3/8"	11.0	57.2	62.7	133.0	11.0	6	12	9	25.0	29.0	36	M5*0.8
1/2"	12.5	66.0	64.7	133.0	11.0	6	12	9	25.0	33.5	36	M5*0.8
3/4"	16.0	77.0	67.7	133.0	11.0	6	12	9	25.0	38.7	36	M5*0.8
1"	20.0	88.0	71.2	133.0	11.0	6	12	9	29.0	46.0	42	M5*0.8
1-1/4"	25.4	103	88.7	178.5	23.5	8	15	11	35.5	51.7	50	M6*1.0
1-1/2"	31.8	111	93.7	178.5	23.5	8	15	11	35.5	61.0	50	M6*1.0
2"	38.1	136	98.2	178.5	23.5	8	15	14	35.5	71.4	50	M6*1.0